



FCC TEST REPORT

On Behalf of

Shenzhen Yide Technology Co., Ltd

Gaming keyboard

Model No.:SKY 2040PLUS, SKY 2040, IT-GK03

Prepared for : Shenzhen Yide Technology Co., Ltd
Address : 302, 3rd Floor, Building A2, Weifu Industrial Park, No.36 Jianan Road, Zhancheng Community, Fuhai Street, Baoan District, Shenzhen

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

Report Number : A2404019-C02-R01
Date of Receipt : April 15, 2024
Date of Test : April 16, 2024
Date of Report : April 22, 2024
Version Number : V0
Test Result : Pass

ALPHA's reports is using a digital certificate that is trusted on Adobe's official server. If there is no digital certificate or the digital certificate shows damaged in your report. Please do not accept the report.

E-mail: service@a-lab.cn Tel: 4008-3008-95 Website: <http://www.a-lab.cn>

TABLE OF CONTENTS

Description	Page
1. General Information	5
1.1. Description of Device (EUT).....	5
1.2. Accessories of Device (EUT)	5
1.3. Tested Supporting System Details.....	6
1.4. Block Diagram of connection between EUT and simulators	6
2. Summary Of Standards And Results	7
2.1. Description of Standards and Results.....	7
2.2. Test Mode Description	7
2.3. Test Equipment List	8
2.4. Test Facility	9
2.5. Measurement Uncertainty	9
3. Power Line Conducted Emission Test	10
3.1. Test Limits	10
3.2. Block Diagram of Test Setup	10
3.3. Configuration of EUT on Test.....	10
3.4. Operating Condition of EUT	10
3.5. Test Procedure	11
3.6. Test Results	12
4. Radiated Emission Test	15
4.1. Test Limit.....	15
4.2. Block Diagram of Test Setup	16
4.3. Configuration of EUT on Test.....	17
4.4. Operating Condition of EUT	17
4.5. Test Procedure	17
4.6. Test Results	18
5. Test Setup Photo	24
5.1. Photo of Radiated Emission Test (In Semi Anechoic Chamber)	24
5.2. Photo of Power Line Conducted Emission Test.....	25
6. Photos Of The EUT	26

TEST REPORT DECLARATION

Applicant : Shenzhen Yide Technology Co., Ltd
Address : 302, 3rd Floor, Building A2, Weifu Industrial Park, No.36 Jianan Road, Zhancheng
Community, Fuhai Street, Baoan District, Shenzhen
Manufacturer : Shenzhen Yide Technology Co., Ltd
Address : 302, 3rd Floor, Building A2, Weifu Industrial Park, No.36 Jianan Road, Zhancheng
Community, Fuhai Street, Baoan District, Shenzhen
EUT Description : Gaming keyboard
(A) Model No. : SKY 2040PLUS, SKY 2040, IT-GK03
(B) Trademark : N/A

Measurement Standard Used:

FCC PART 15:2021

(Part 15 Subpart B Class B, ANSI C63.4:2014)

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Jerry Yin
Project Engineer

Approved by (name + signature).....: Reak Yang
Project Manager

Date of issue.....: April 22, 2024



Revision History

Revision	Issue Date	Revisions	Revised By
V0	April 22, 2024	Initial released Issue	Jerry Yin

1. General Information

1.1. Description of Device (EUT)

Product Name : Gaming keyboard

Model Number : SKY 2040PLUS, SKY 2040, IT-GK03

Diff : There is no difference except the name of the model. All tests are made with the SKY 2040PLUS model.

Test Voltage : DC 5V From PC

EUT information : Input:DC 5V

Highest Frequency : More than 108MHz

Software version : N/A

Hardware version : N/A

1.2. Accessories of Device (EUT)


Power Source : N/A

1.3. Tested Supporting System Details.

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1.	Portable laptop	Lenovo	Think Centre M710s-N00	M905AGT8	N/A

1.4. Block Diagram of connection between EUT and simulators

For test



Signal Cable Description of the above Support Units

No.	Port Name	Cable	Length	Shielded (Yes or No)	Detachable (Yes or No)
(a)	N/A	N/A	N/A	N/A	N/A

2. Summary Of Standards And Results

2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

EMISSION			
Description of Test Item	Standard	Limits	Results
Power Line Conducted Emission Test	FCC Part 15 ANSI C63.4:2014	Class B	P
Radiated Emission Test	FCC Part 15 ANSI C63.4:2014	Class B	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.			

2.2. Test Mode Description

For Tests		
Mode No.	Test Mode	Test Voltage
Mode 1	Data transmission	DC 5V From PC
Mode 2	Standby	DC 5V From PC
Note: Mode 1 is worst case mode tests, so this report only reflected the worst mode in this part.		

2.3. Test Equipment List

For Power Line Conducted Emission Test Equipment:

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Last Cal.	Cal.Interval
1.	Test Receiver	Rohde&Schwarz	ESCI	101165	4.42 SP1	2023.08.16	1 Year
2.	L.I.S.N.#1	Schwarz beck	NSLK8126	8126-466	N/A	2023.08.16	1 Year
3.	L.I.S.N.#2	Rohde&Schwarz	ENV216	101043	N/A	2023.08.16	1 Year
4.	Pulse Limiter	Schwarz beck	9516F	9618	N/A	2023.08.16	1 Year
5.	ISN	SCHWARZBECK	CAT5 8158	00316	N/A	2023.03.30	1 Year
6.	ISN	SCHWARZBECK	NTFM 8158	00273	N/A	2023.03.30	1 Year
7.	ISN	SCHWARZBECK	CAT3 8158	CAT3 8158 #167	N/A	2023.03.30	1 Year

For Frequency Range 30MHz~1GHz Radiated Emission Test Equipment:

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Last Cal.	Cal. Interval
1	Test Receiver	Rohde&Schwarz	ESR	1316.3003K0 3-102082-Wa	2.28 SP1	2023.08.16	1 Year
2	Bilog Antenna	Schwarz beck	VULB 9168	VULB 9168#627	N/A	2023.08.28	2 Year

For Frequency Range above 1GHz Radiated Emission Test Equipment:

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Rohde&Schwarz	FSU	200002	4.71.SP5	2023.08.16	1 Year
2	Horn Antenna	Schwarz beck	BBHA 9120 D	02106	N/A	2023.08.19	2 Year
3	Amplifier	Agilent	8449B	3008A02664	N/A	2023.08.16	1 Year

For Test Software Information

Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1

2.4. Test Facility

Shenzhen Alpha Product Testing Co., Ltd.

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

2.5. Measurement Uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	1.63dB
Uncertainty for Radiation Emission test (<1G)	3.74 dB (Distance: 3m Polarize: V)
	3.76 dB (Distance: 3m Polarize: H)
Uncertainty for Radiation Emission test (>1G)	3.77 dB (Distance: 3m Polarize: V)
	3.80 dB (Distance: 3m Polarize: H)
(95% confidence levels, k=2)	


3. Power Line Conducted Emission Test

3.1. Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes:
1. Emission level=Read level + LISN factor-Preamplifier factor + Cable loss
 2. * Decreasing linearly with logarithm of frequency.
 3. The lower limit shall apply at the transition frequencies.

3.2. Block Diagram of Test Setup

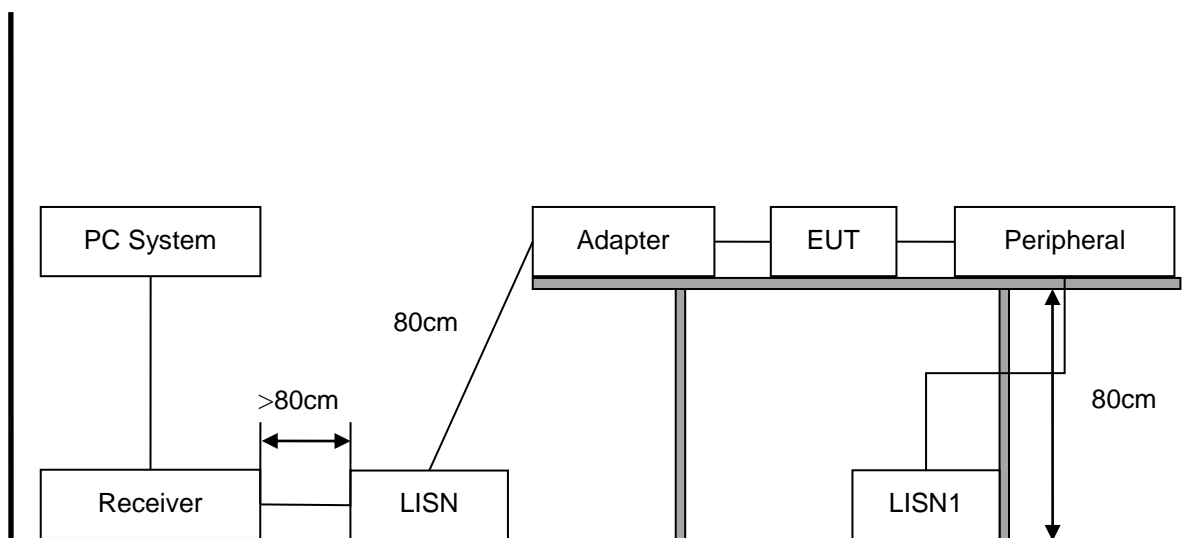

3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 3.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.


3.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014 on conducted Emission test.
- (2) The frequency range from 150kHz to 30MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 9kHz.

3.6. Test Results

Test Date	: 2024.4.16	Temperature	: 23.5℃
Test Engineer	: Jerry Yin	Humidity	: 61%
Test Mode	: Data transmission		
Test Results	: PASS		
Note:			
1. The test results are listed in next pages.			
2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.			
3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.			

Polarization: Line

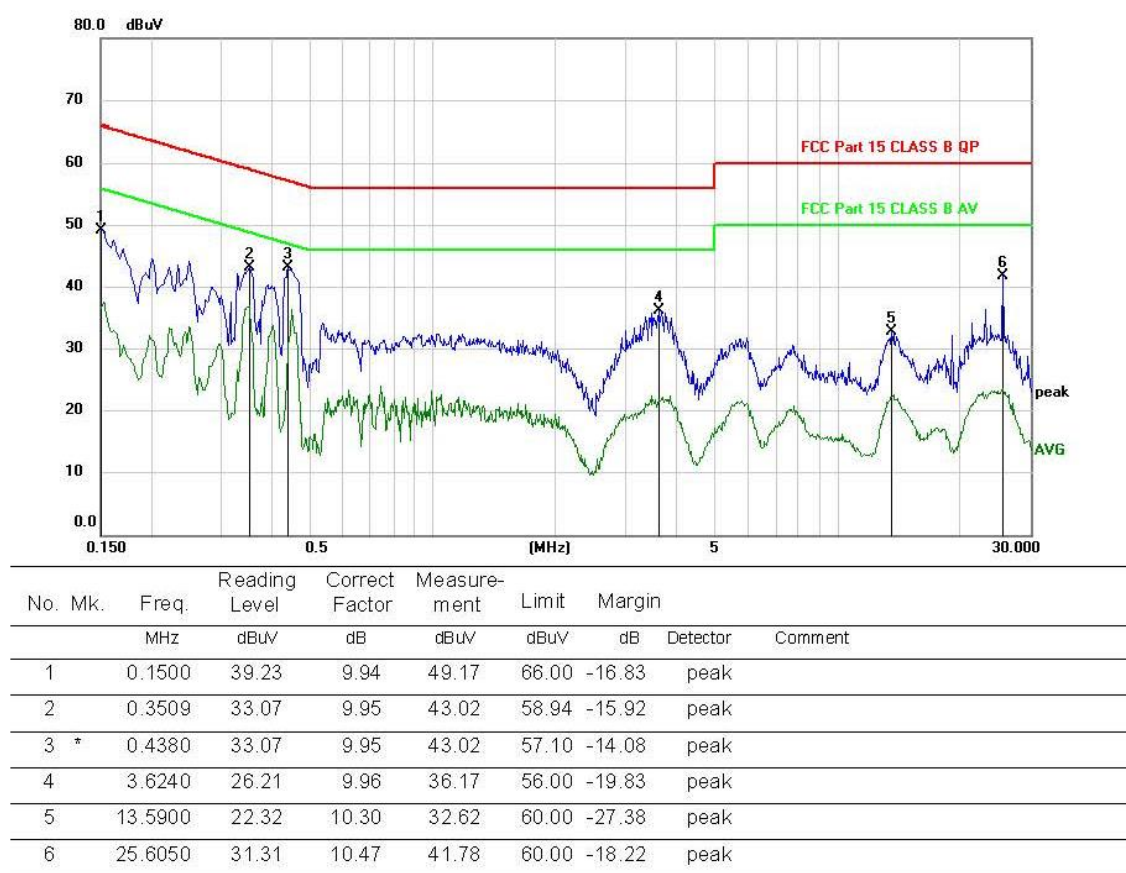


*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Polarization: Neutral

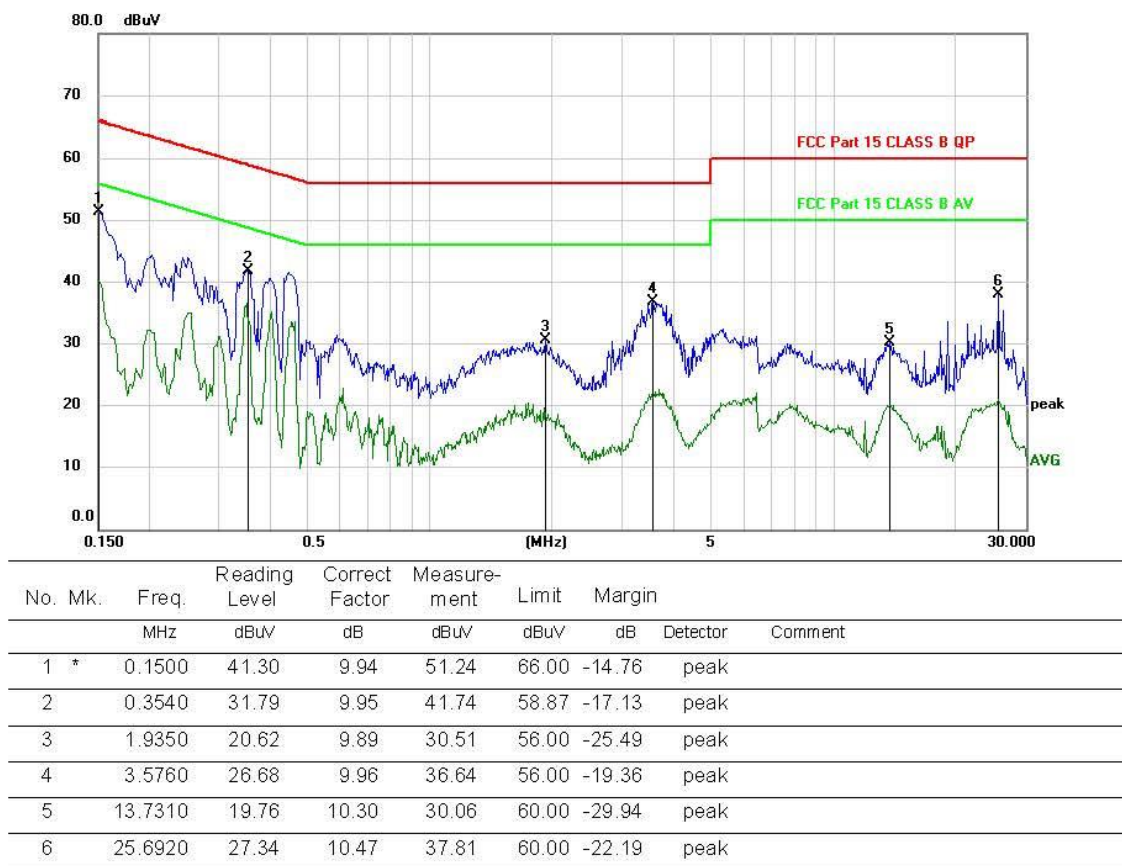

*:Maximum data x:Over limit !:over margin (Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

4. Radiated Emission Test

4.1. Test Limit


Frequency MHz			Distance (Meters)	Field Strengths Limits dB(μ V)/m
30	~	88	3	40.0
88	~	216	3	43.5
216	~	960	3	46.0
960	~	1000	3	54.0
Above 1GHz			3	74(Peak) 54(Average)

- Notes:
1. The smaller limit shall apply at the cross point between two frequency bands.
 2. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 3. Frequency range of radiated measurements:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

4.2. Block Diagram of Test Setup

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

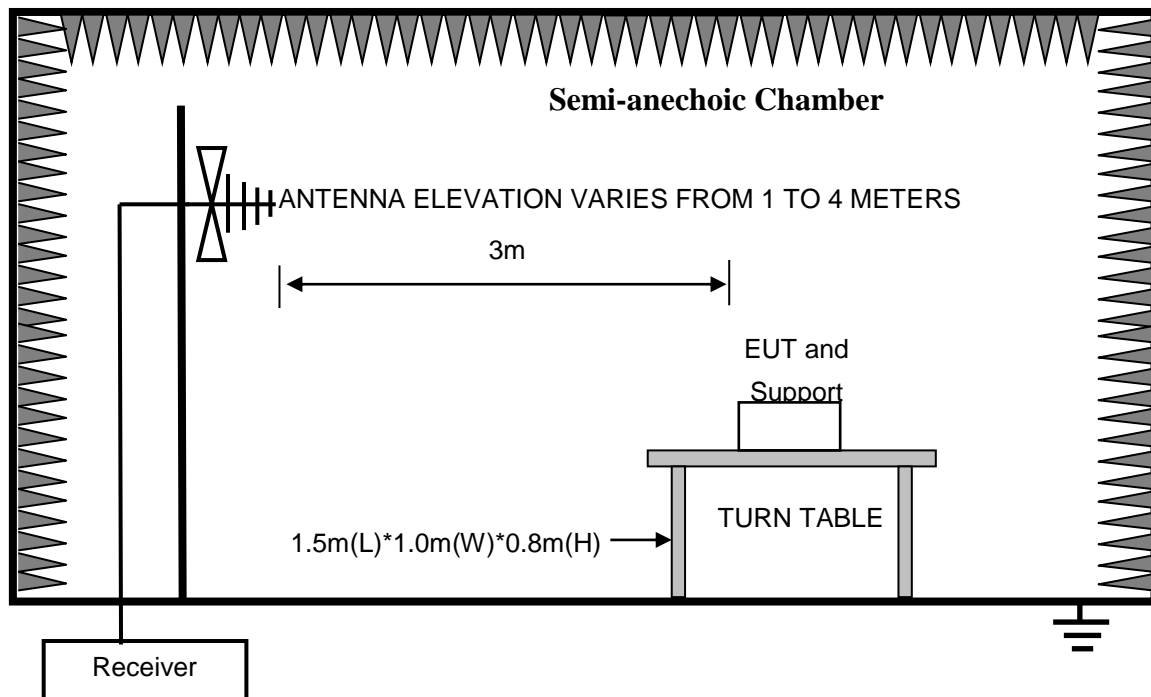

In Semi Anechoic Chamber (3m) Test Setup Diagram for Above 1GHz

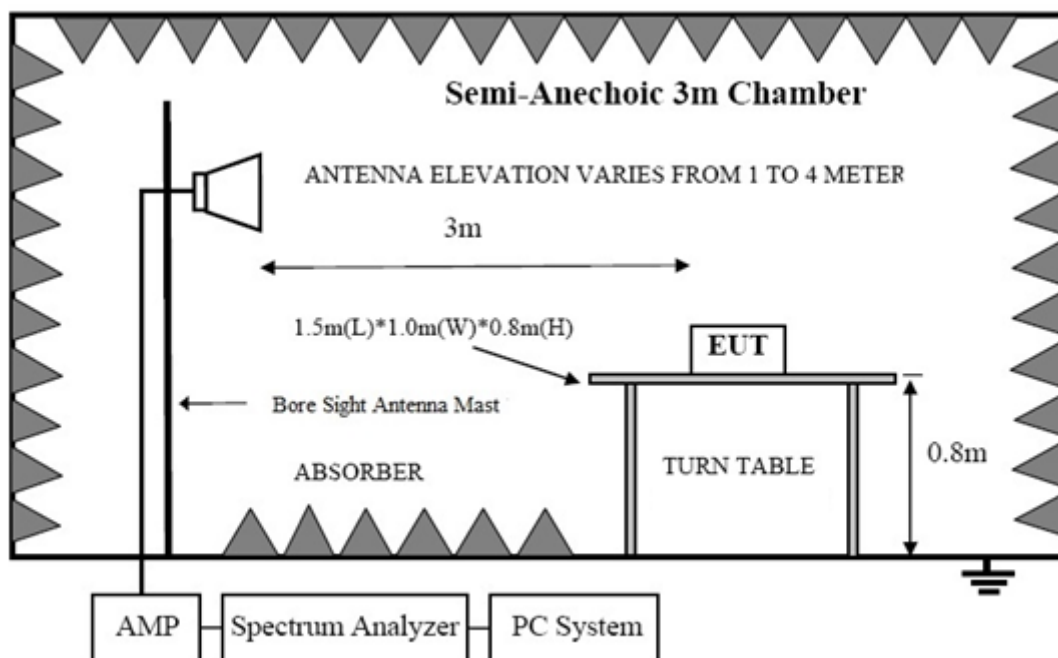

4.3. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

4.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 4.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.


4.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) The frequency range from 30MHz to 1000MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESR) is set at 120kHz.
- (4) The frequency range from above 1GHz is checked, the bandwidth of spectrum analyzer (Spectrum Analyzer FSV40-N) is set at 1MHz.
- (5) The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values, the frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (6) The test results are reported on Section 4.6.

4.6. Test Results

Frequency Range : 30MHz~1000MHz	
Test Date : 2024.4.16	Temperature : 23.5℃
Test Engineer : Jerry Yin	Humidity : 51%
Test Mode : Data transmission	
Test Results : PASS	
<p>Note: 1. The test results are listed in next pages.</p> <p>2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet limits and the measurement with the quasi-peak detector need not be carried out.</p>	

Antenna Polarity: Vertical

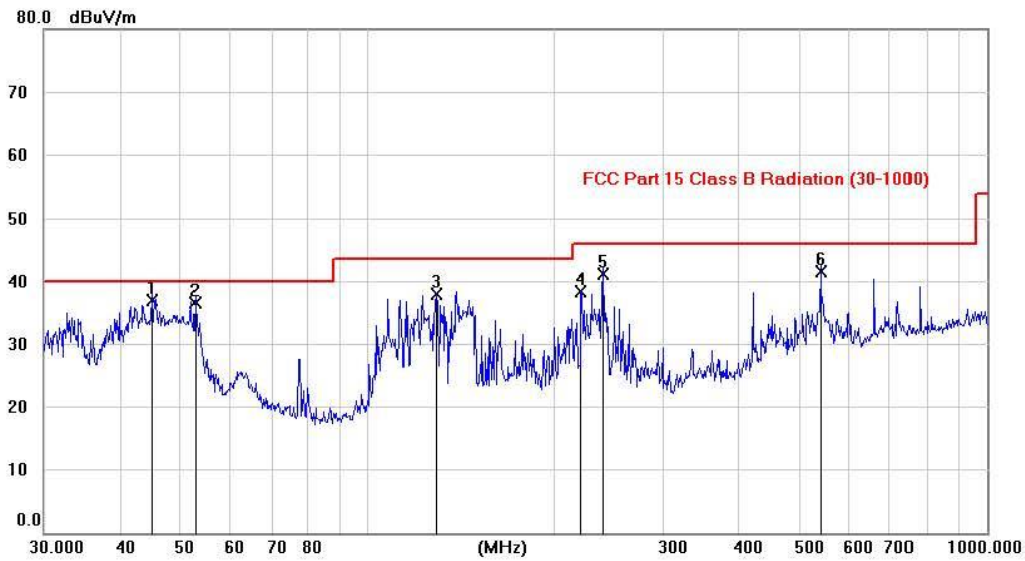


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	44.9950	22.77	14.10	36.87	40.00	-3.13	QP		
2		52.7600	22.81	13.76	36.57	40.00	-3.43	QP		
3		129.1048	24.33	13.54	37.87	43.50	-5.63	QP		
4		220.7718	26.44	11.78	38.22	46.00	-7.78	peak		
5		239.9873	28.52	12.55	41.07	46.00	-4.93	QP		
6		540.0452	22.45	19.02	41.47	46.00	-4.53	QP		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Antenna Polarity: Horizontal

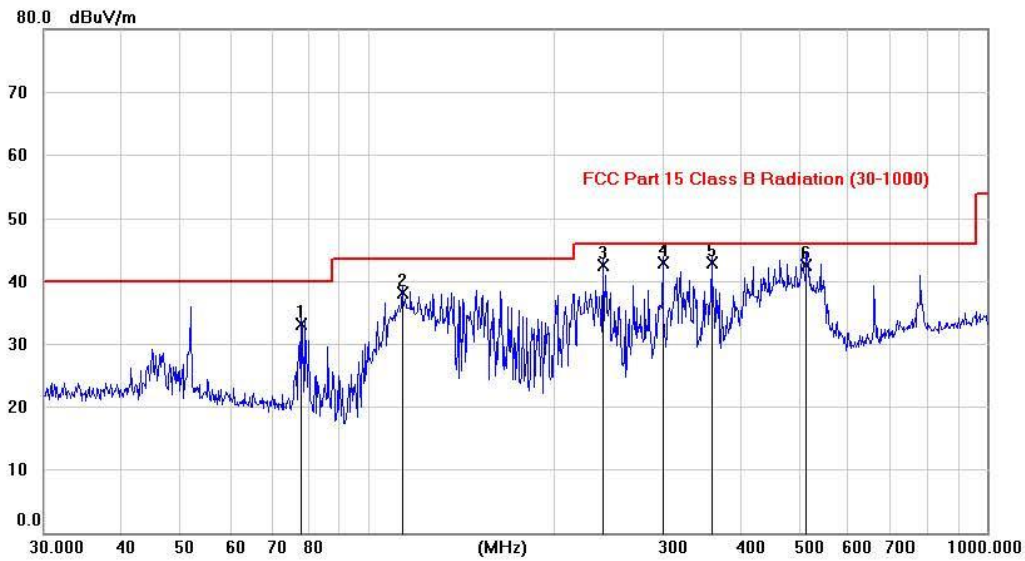


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		78.4133	23.13	10.07	33.20	40.00	-6.80	QP		
2		114.0737	25.77	12.32	38.09	43.50	-5.41	QP		
3		239.9873	29.91	12.55	42.46	46.00	-3.54	QP		
4	*	300.0514	28.77	14.10	42.87	46.00	-3.13	QP		
5		360.0686	27.39	15.43	42.82	46.00	-3.18	QP		
6		512.3739	24.14	18.43	42.57	46.00	-3.43	QP		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Frequency Range : Above 1GHz	
Test Date : 2024.4.16	Temperature : 23.5℃
Test Engineer : Jerry Yin	Humidity : 51%
Test Mode : Data transmission	
Test Results : PASS	
Note:	<ol style="list-style-type: none">1. The test results are listed in next pages.2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet limits and the measurement with the average detector need not be carried out.


Antenna Polarity: Vertical

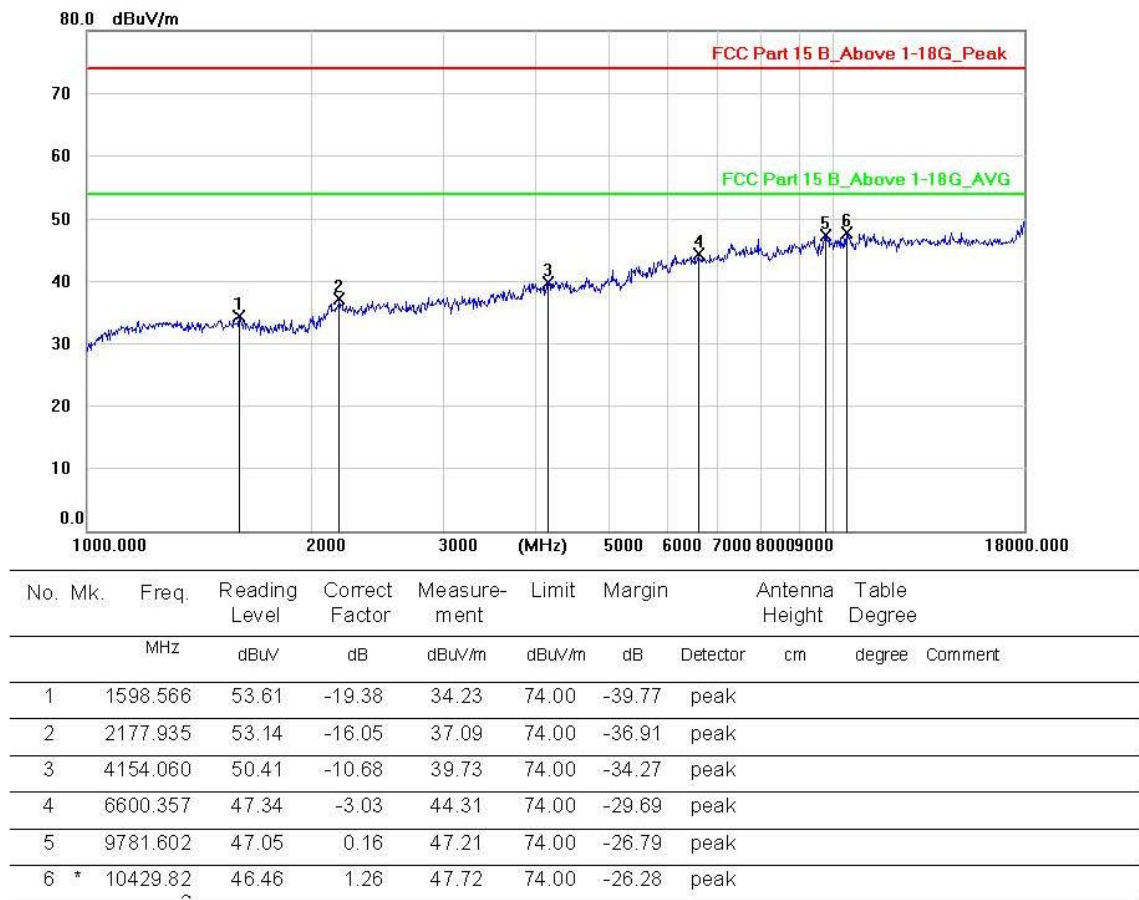

Note: 1. *: Maximum data; x: Over limit; l: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Antenna Polarity: Horizontal

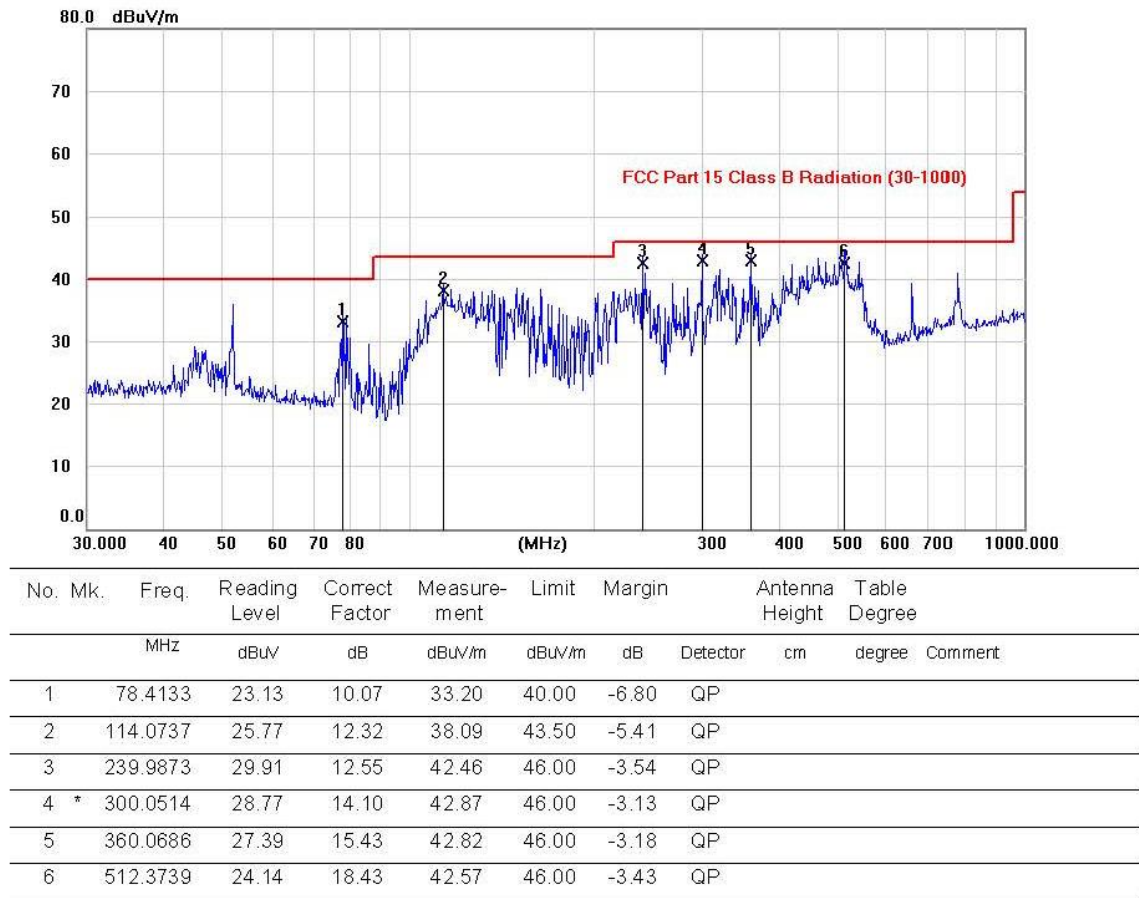


Note: 1. *: Maximum data; x: Over limit; l: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

5. Test Setup Photo

5.1. Photo of Radiated Emission Test (In Semi Anechoic Chamber)


30-1000MHz

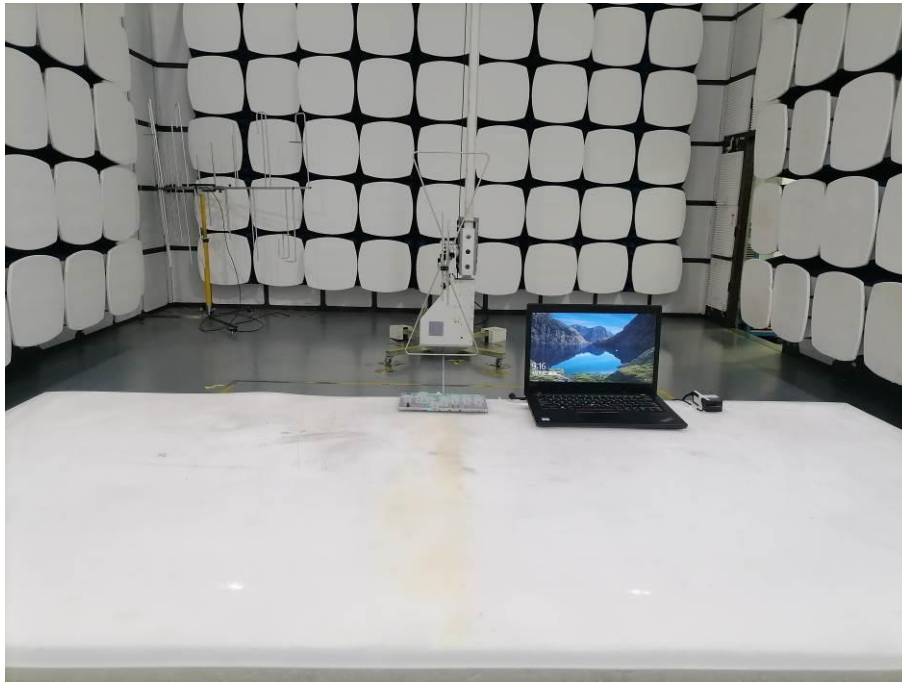


Above 1GHz




5.2.Photo of Power Line Conducted Emission Test

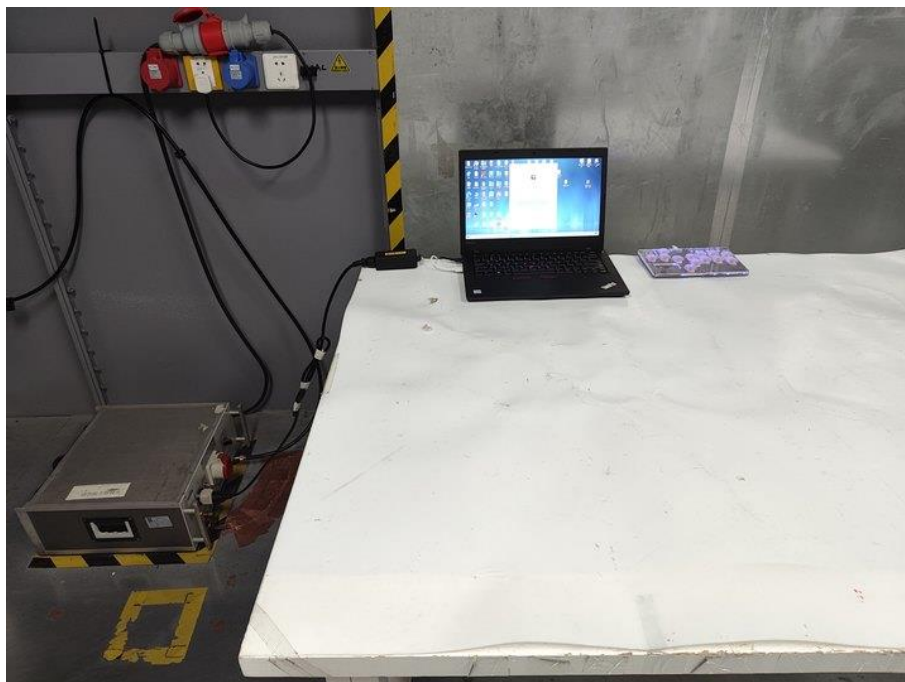


6. Photos Of The EUT

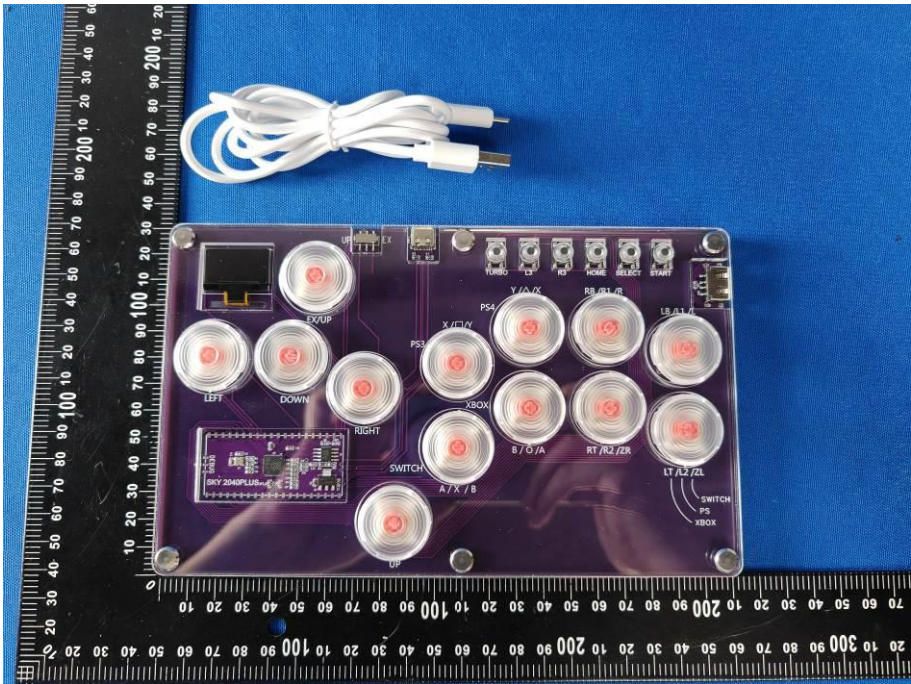


EUT View

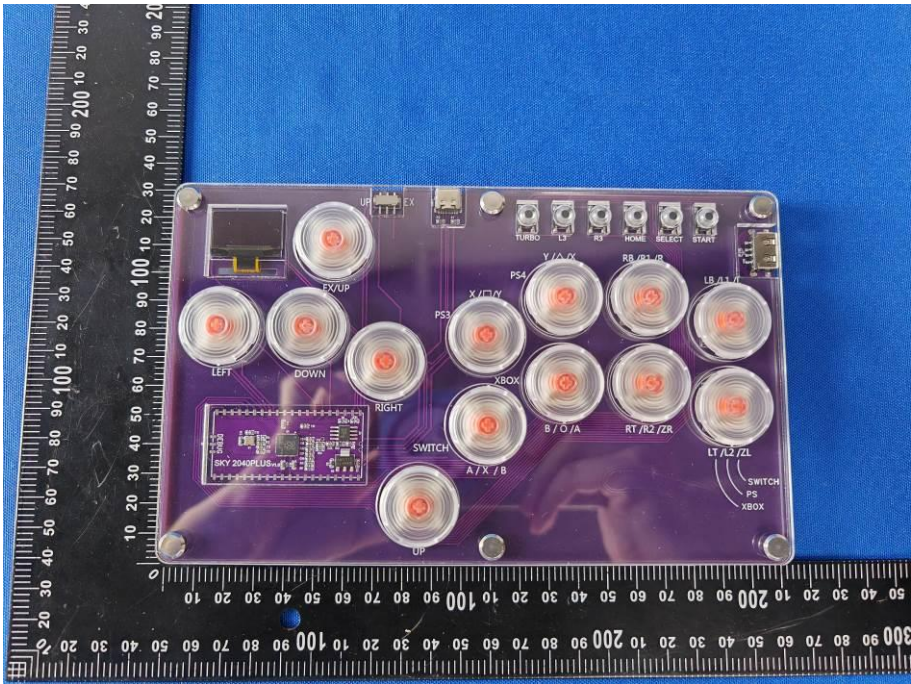



EUT View


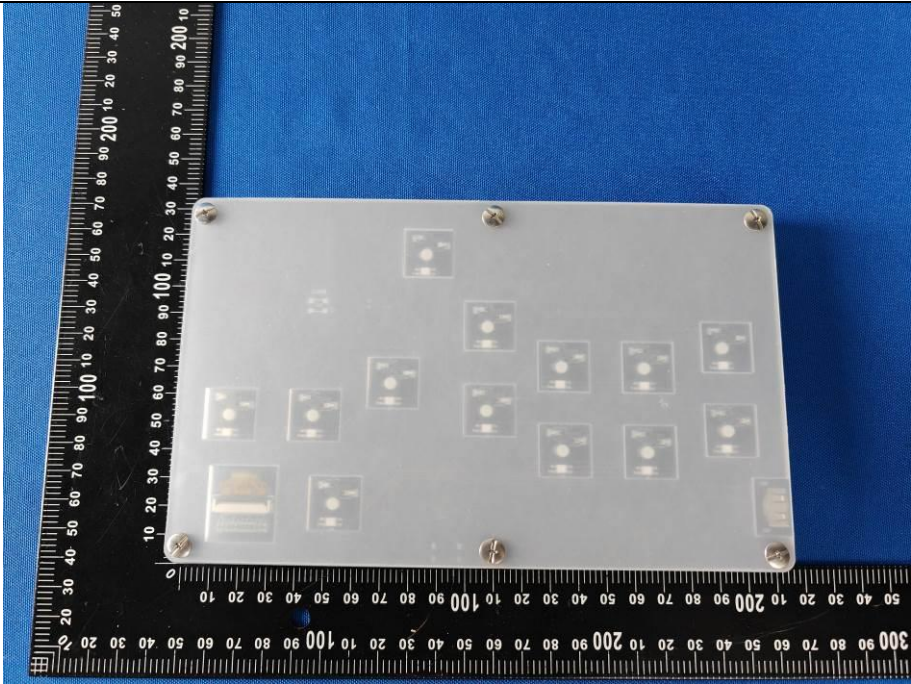



EUT View

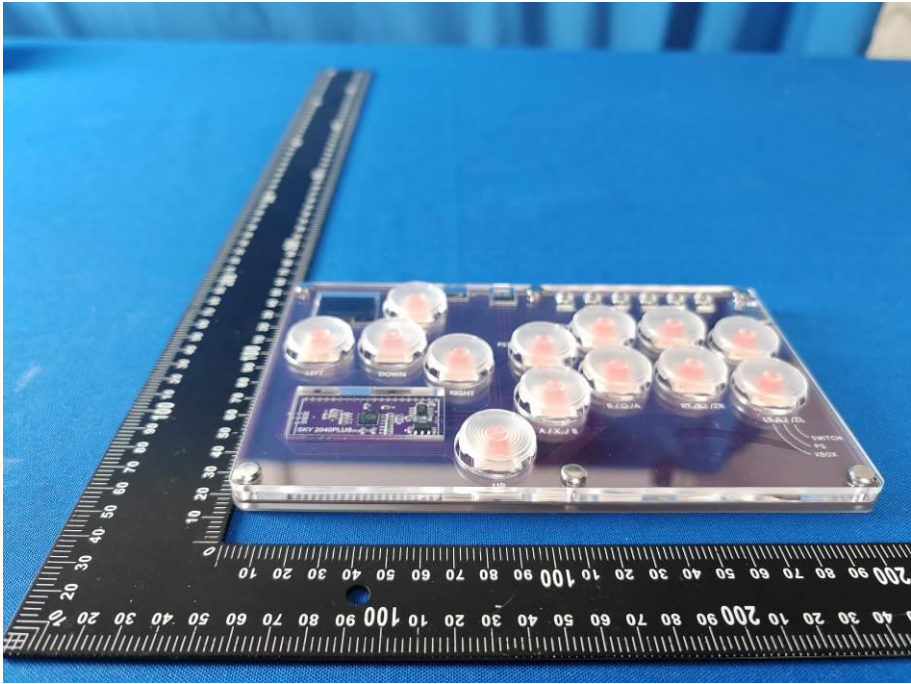

EUT View

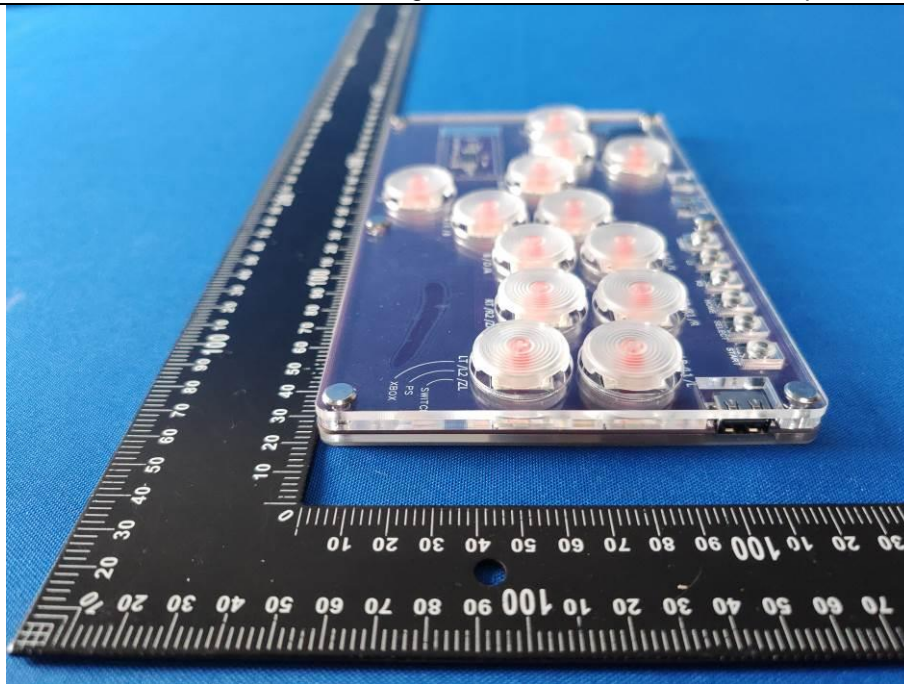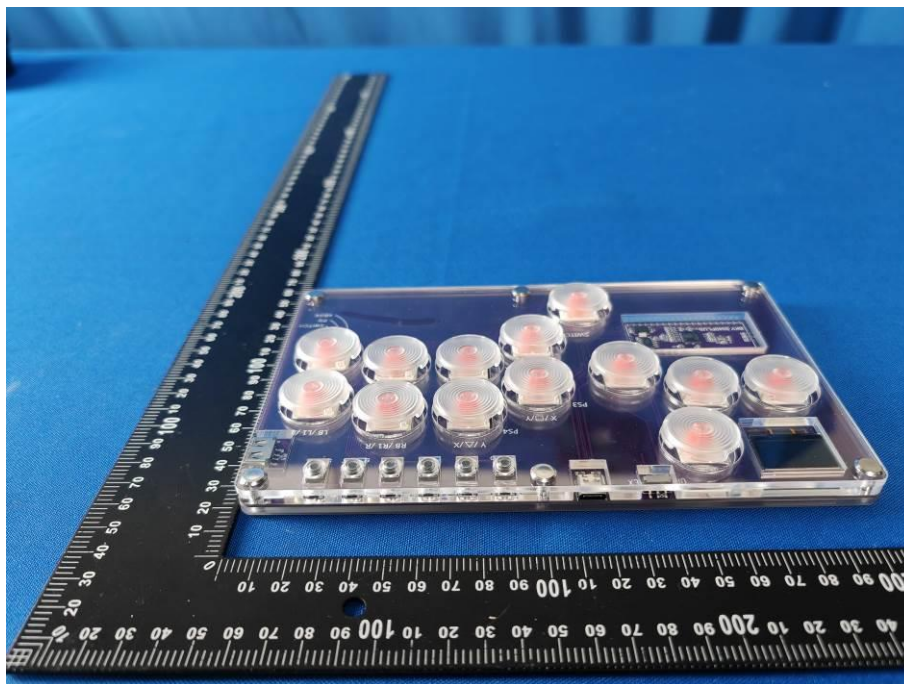**EUT View****EUT View**

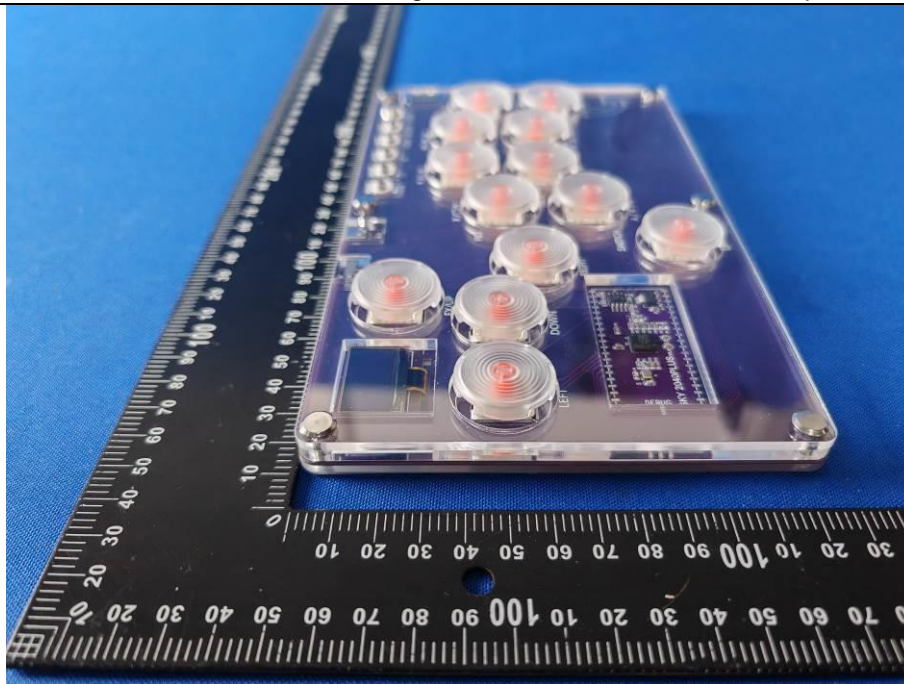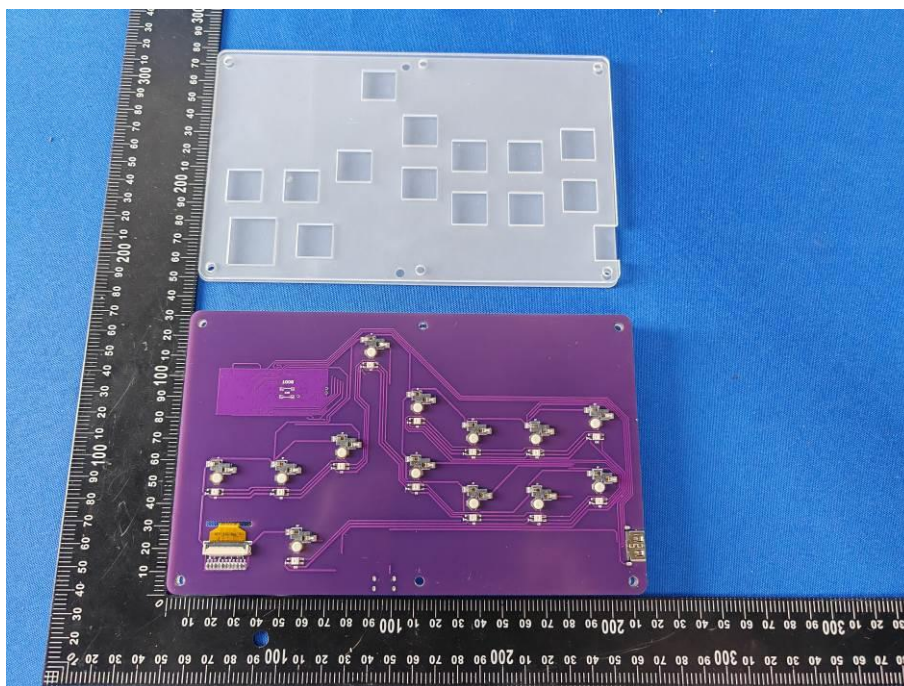**EUT View****EUT View**

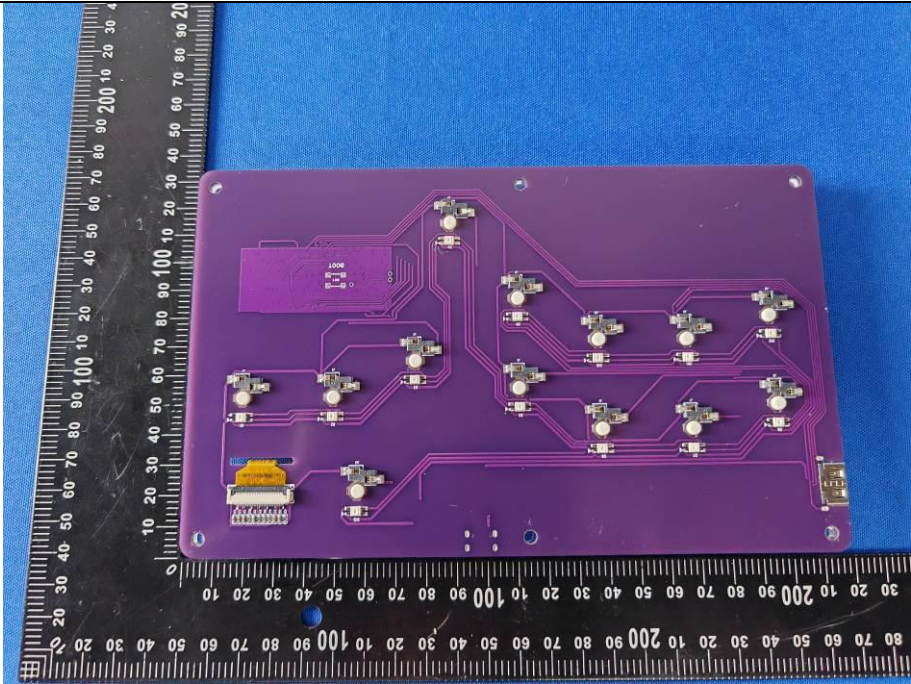


EUT View




EUT View




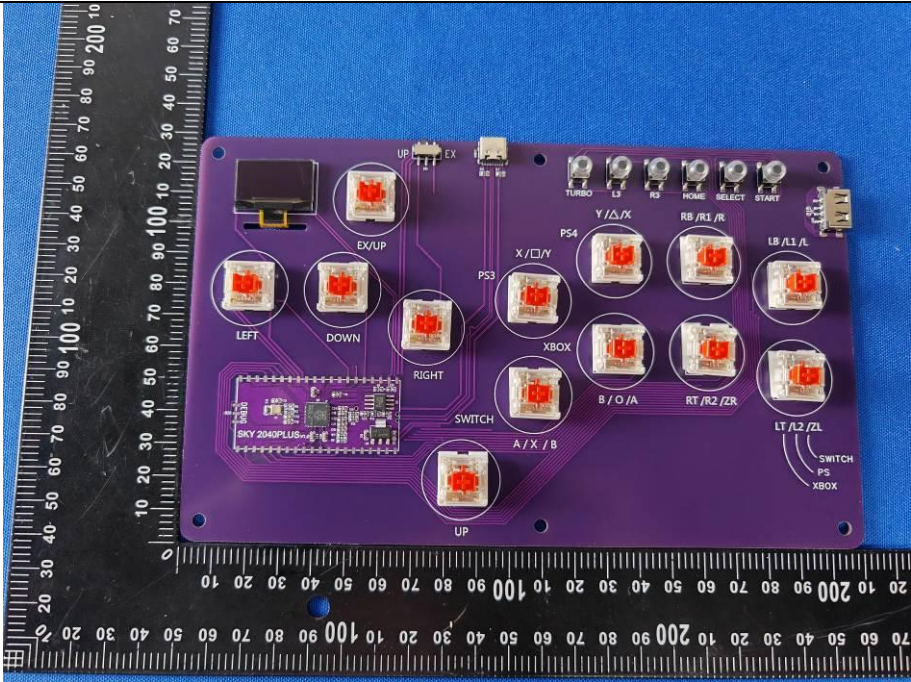

EUT View

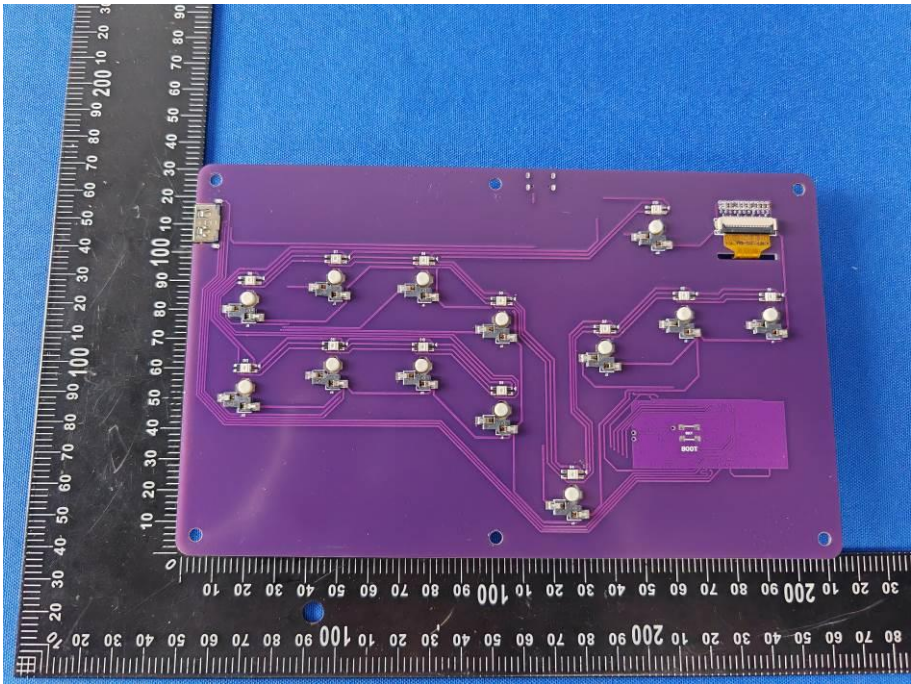

EUT View

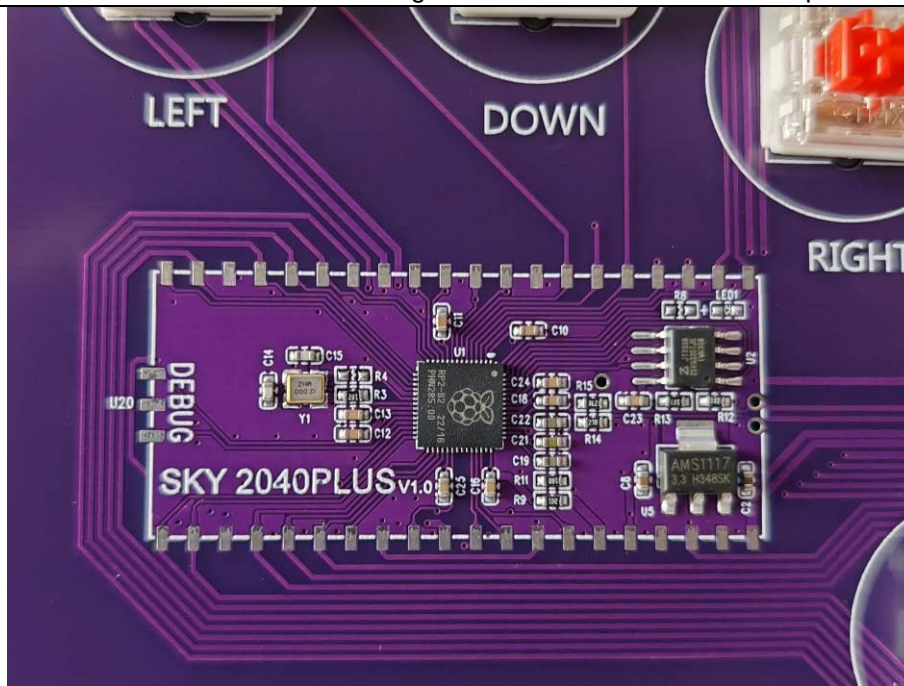

EUT View

-----END OF REPORT-----